Revolutionise scanning performance

Raising productivity to the next level

FUJITSU Image Scanner fi-6800

- Efficient. Lower costs with fast set up and push-button simplicity
- Flexible. Handle wide range of mixed documents
- Reliable. Deal with paper feed challenges before they cause issues
- Secure. Protect data with reliable paper flow and image enhancement
- Convenient. Manage scanners in wide-area networks from a single location







shaping tomorrow with you



Production level business enhancing performance

The fast and intuitive FUJITSU Image Scanner fi-6800 mid-volume scanner brings significant operating benefits to paper intensive organisations. A unique compact design provides users with a solution that is ready to improve productivity without delay. Rapid start up time, smooth paper flow and ease of use all contribute to an efficient end-to-end image capture process and powerful software ensures document preparation and post-scan procedures are minimised.

Automated routines deliver a performance bonus to document-hungry businesses when archiving records, satisfying compliance requirements and introducing ad hoc documents to workflows. The result is a robust scanner that reduces the total cost of ownership and provides a fast return on investment.



Experience faster throughput

Convert large volumes of documents with speed and dependable throughput every day. The fi-6800 minimises operator alerts through a host of automated functionalities to provide uninterrupted performance when processing large batches of documents. Set up and refinements of the fi-6800 are so easy to manage that intentional adjustments of workflow routines can be achieved even on an ad hoc basis.

The fi-6800 can scan at speeds of 130 pages per minute (ppm) or 260 images per minute (ipm) at 300 dpi in A4 landscape mode. When higher resolutions are needed operators can select up to 600 dpi.

Benefit from excellent paper feed performance

Operators can manage mixed document batches efficiently when the physical characteristics of documents change within the batch. The fi-6800 handles different sized sheets from A8 to A3 and differences in materials such as when paper, card and plastic vary in weight and thickness – leaving the operator free to attend to parallel tasks without being distracted by avoidable misfeed alerts.

fi-6800 side view



A4 Landscape at 300 dpi 130 ppm / 260 ipm A4 Portrait at 300 dpi 100 ppm / 200 ipm Scan mixed batches through the 500 sheet hopper





The fi-6800 incorporates a top-of-the-line paper-feed mechanism with 'Paper Protection' and 'Multifeed Protection' functions that can anticipate paper feed problems before they happen. The Intelligent Multifeed Function allows document scan parameters to be applied which enables the sensors to be set up to help identify and subsequently ignore attachments such as sticky notes or items with a photo attached that would otherwise cause disruptions to the scanning process.

Compact design and environmentally friendly

The fi-6800 has an impressively small desk-footprint and near-silent operation, in addition a foldaway hopper means that the fi-6800 is suitable for placement in a range of office locations. The scanner helps support environmental policies such as waste management, recycling initiatives and sustainability.

Perform more efficient post-scan tasks

Time saving, image enhancing features such as Automatic Colour Detection, Automatic Orientation, Advanced Paper Detection and Multifeed Detection contribute to more efficient document processing day after day. The 'Automatic Image Quality Checker' automatically detects post-scan image irregularities such as folds or tears while the 'Automatic Stacker' ensures the correct arrangement of scanned documents for archiving.

Management from single location

Scanner Central Admin software enable Fujitsu scanners to be managed and maintained from a single location to minimise scanner downtime anywhere on the global system.

Software, interfaces and compatibility

The integrated operating panel and LCD give at-a-glance settings, operating status and pre-set scan options. The fi-6800 can be operated through USB or SCSI interfaces, allowing for direct TWAIN and ISIS driver control.

Optional extras




Post Imprinter (front side) (fi-680PRF) {Part Number – PA03575-D201} Post Imprinter (reverse side) (fi-680PRB)

{Part Number – PA03575-D203}

The imprinter option enables users to print information on original documents for document management purposes. While the fi-680PRF (post imprinter) prints information on the front of documents, the fi-680PRB (post imprinter) prints information on the reverse side of documents after they have been scanned.

CGA board (fi-680CGA)

{Part Number – PA03575-K301} This CGA board option with VRS Professional offers further image enhancement possibilities

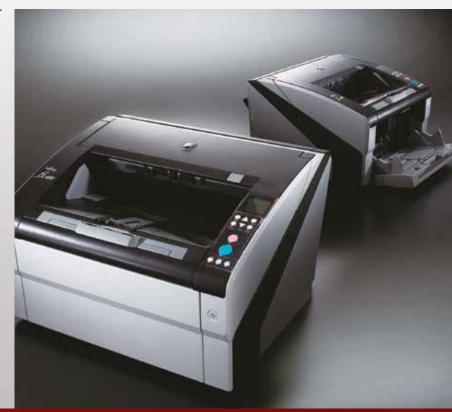



Bundled software

Fujitsu best-in-class scanner driver and document capturing software

Z

PaperStream IP

Scanner driver for high-quality image enhancement

- TWAIN and ISIS compliant scanner driver
- Industry leading integrated image enhancement capabilities
- Patch code and barcode recognition
- Pre-defined and custom scanning profiles for routine tasks
- Supports the user when needed with visual guidance through "Assisted Scan"
- Auto cropping, auto deskew, auto colour detecting, auto blank page detection and deletion

PaperStream Capture

Efficient, high-quality front-end capture solution

 One-stop batch scanning application that simplifies and accelerates the routine task of document capture through its 'One Click Capture' concept

- High-speed, high volume scanning with real-time image display, bar code detection and indexing
- PaperStream IP is an integral part of PaperStream Capture and ensures high-quality images
- Scan-verify-index-release in a single, streamlined routine that every user can easily perform
- Supports ad hoc scanning requirements for exception handling through "Assisted Scan" and, where required, instantly changing settings

Specifications

| Nodel | | fi-6800 | ^{*1} Class 1 LED product |
|--|---------------------------|--|---|
| Supported operating systems | | See http://emea.fujitsu.com/fiscannerfaqs/ for further information | *2 The fi-6800 is capable of scanning documents that |
| Scanner type | | ADF (automatic document feeder) and manual feed | exceed A3 in length: Documents up to 863 mm in |
| Scanning modes | | Simplex / Duplex, Colour / Greyscale / Mono | length can be scanned at resolutions up to 400 dpi |
| Image sensor type | | Colour CCD (charge coupled device) x 2 | and documents between 863 mm and 3,048 mm |
| Light source | | White LED array*1 | can be scanned at resolutions between 50 dpi and 200 dpi (Long paper scanning does not support |
| Document size | | Minimum: A8 Portrait (52 x 74 mm) / Maximum: A3 (297 x 420 mm) | resolutions that exceed 400 dpi). |
| Document size | | Long page scanning: 3,048 mm ^{*2} | ^{*3} Actual scanning speeds are affected by data |
| Recommended paper weight | | 20 to 209 g/m ² | transmission and software processing times. |
| Scanning speed (A4 Landscape)*3 Colour*4 / Grevscale*4 / Mono | | Simplex: 130 ppm (200, 300 dpi), Duplex: 260 ipm (200, 300 dpi) | ^{*4} JPEG compressed figures. |
| | | | ^{*5} Maximum capacity varies, depending upon paper |
| | | Simplex: 100 ppm (200, 300 dpi), Duplex: 200 ipm (200, 300 dpi) | weight. |
| Scanning speed (A4 Portrait)*3 Colour*4 / Grevscale*4 / Mono | | | *6 Maximum output resolutions may vary, |
| | | | depending upon the size of the area being |
| Paper chute capacity*5 | | 500 sheets (A4: 80 g/m ²) | scanned and whether the scanner is scanning in |
| Background colours | | White / Black (Selectable) | simplex or duplex. |
| Optical resolution | | 600 dpi | *7 Scanning limitations due to scanning mode, document |
| | Colour / Greyscale / Mono | 50 to 600 dpi (adjust by 1 dpi increments), 1,200 dpi (driver)*7 | size and available memory may occur when scanning at high resolutions (600 dpi or higher). |
| Output format | | Colour: 24 bit / 8 bit, Greyscale: 8 bit, Mono: 1 bit | ^{*8} You cannot use both SCSI and USB 2.0 interfaces at |
| Interface ^{*8} / Connector shape | | Ultra Wide SCSI, USB 2.0, USB 1.1 (Selectable) / Ultra SCSI: Shield type 50 pin (pin type), USB: B type | the same time. |
| Image processing functions | | Automatic colour detection, Automatic page size detection, De-Skew, Automatic orientation, Upper lower separation, | *9 Excluding the ADF hopper. |
| | | Multi-image, Blank page skip, Error diffusion, Dither, Dropout colour (R, G, B, None, White, Specified, Saturation), | ^{*10} PFU LIMITED, a Fujitsu company, has determined |
| | | Image emphasis, Simplified DTC, Advanced DTC, iDTC, sRGB | that this product meets RoHS requirements |
| Power requirements / Power consumption | | AC 100 to 240V, ±10% / Operating: 200W or less (Sleep mode: 3.2W or less) Auto standby (OFF) mode: 0.5W or less | (2011/65/EU) |
| Operating environment | | Temperature: 15 to 35°C, Relative humidity: 20 to 80% (Non-condensing) | *11 PFU LIMITED, a Fujitsu company, has determined |
| Dimensions (W x D x H)*9 / Weight | | 460 x 430 x 310 mm / 32 kg | that this product meets Ecodesign Directive |
| Included software / drivers | | PaperStream IP Driver (TWAIN & ISIS™), 2D Barcode for PaperStream, Software Operation Panel, | requirements (2009/125/EC) |
| | | Error Recovery Guide, PaperStream Capture, Scanner Central Admin tools | ^{*12} Geographic Limitations may apply to Service |
| Environmental compliance | | ENERGY STAR [®] / RoHS ^{*10} / Ecodesign ^{*11} | Plans and Service Levels in some countries. |
| Others | Double-feed detection | 3 ultrasonic double-feed detection sensors | Please contact us for more information. |
| Standard Warranty (included in th | ne price of the product) | 1 Year Standard Warranty: Onsite Service - Next Business Day Response +1 Preventative Maintenance | |
| 0 41 L6 1 D1 ⁴¹² | | | |
| | Order by Part Number | Service Description | |
| Extended Warranty | U3-EXTW-MVP | 3 Year Extended Warranty: Onsite Service - Next Business Day Response +1 Preventative Maintenance per year | |
| | | | |

| order by rune multimet | bei rice beschiption |
|------------------------|--|
| U3-EXTW-MVP | 3 Year Extended Warranty: Onsite Service - Next Business Day Response +1 Preventative Maintenance per year |
| U3-SILV-MVP | 3 Year Service Plan: Onsite Service - 8 Hour Response + 8 Hour Fix +1 Preventative Maintenance per year |
| U3-GOLD-MVP | 3 Year Service Plan: Onsite Service - 8 Hour Response + 8 Hour Fix +2 Preventative Maintenance per year |
| U3-PLAT-MVP | 3 Year Service Plan: Onsite Service - 8 Hour Response + 8 Hour Fix +3 Preventative Maintenance per year |
| | U3-EXTW-MVP U3-SILV-MVP U3-GOLD-MVP |

Onsite Service = A visit by a technician with a spare parts kit to repair the product at your premises. **Preventative Maintenance** = A scheduled visit by a technician to disassemble, clean, lubricate, recalibrate, reassemble and test.

All names, manufacturer names, brand and product designations are subject to special trademark rights and are manufacturer's trademarks and/or registered brands of their respective owners. All indications are non-binding. Technical data is subject to change without prior notification.



PFU (EMEA) Limited Frankfurter Ring 211 80807 Munich Germany

Tel: +49 (0)89 32378 0

PFU (EMEA) Limited Viale Monza, 259 20126 Milano (MI) Italy

Tel: +39 02 26294 1

PFU (EMEA) Limited Camino Cerro de los Gamos, 1 28224 Pozuelo de Alarcón Madrid Spain

Tel: +34 91 784 90 00

FUJITSU

